




PRODUCTS LIST

- Speaker >
- Piezoceramic Ultrasonic >
- Components&Piezoceramic >
- Elements & Buzzers >
- Electret Condenser >
- Microphone >
- Telephone Receiver >
- Polythene Variable Capacitor >
- Polythene Variable Capacitor
- Tweeter >
- Horn and Driver >

Products

Home > Products > Polythene Variable C... > Polythene Variable C... > CBM-443BF-1AB4a(代号...

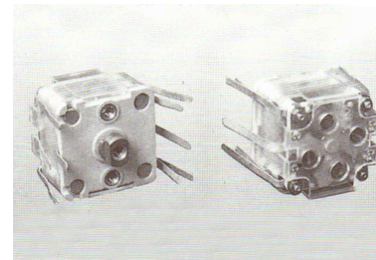

Products Detail

产品规格 Products specification

代号 Code	型号 Model	安装方式 Mounting type	外形尺寸 Dimensions (mm)	联数 Sections	最大可变容量 Max.var.Capacitance(pF)	最小容量 Min.Capacitance(pF)	容量公差 Tolerance of Capacitance(pF)
088	CBM-443BF-1AB4a	1	21×21×17	AM-2	266×2	6±2	(0):±(2pF+2%) (A):±(1.5pF+1.5%)
				FM-2	20×2	4.5±1.5	(0):±(1pF+1%) (A):±(1.5pF+1.5%)

技术特性 Specifications

型号 Model	绝缘电阻 Insulation Resistance (MΩ)	动片接触电 阻 Rotor Contanct Resistance (MΩ)	耐电压 Voltage Proof (V.D.C)	Q		转动力矩 Operating Torque (gf.cm)	止端力矩 End Stop Torque (kgf.cm)	微调增量 Trimmer Cap.Swing (pF)	转动方向 Rotation Direction	转动角度 Rotation Angle
				AM:(1MHz50pF)	FM:(100MHz10pF)					
CBM-443BF-1AB4a	AM:≥500 FM:≥250	< 20	≥100	≥500	≥200	50~400	≥5	≥5	·	97 ± 2 1 % (180 ° 为 100%) <sup>①</sup>

电容量曲线 Capacitance curve

