


版本	修改记录	记录人	日期
V1.0	初版发行。		2020-08-19


前视图 1:1



侧视图 横向1:1

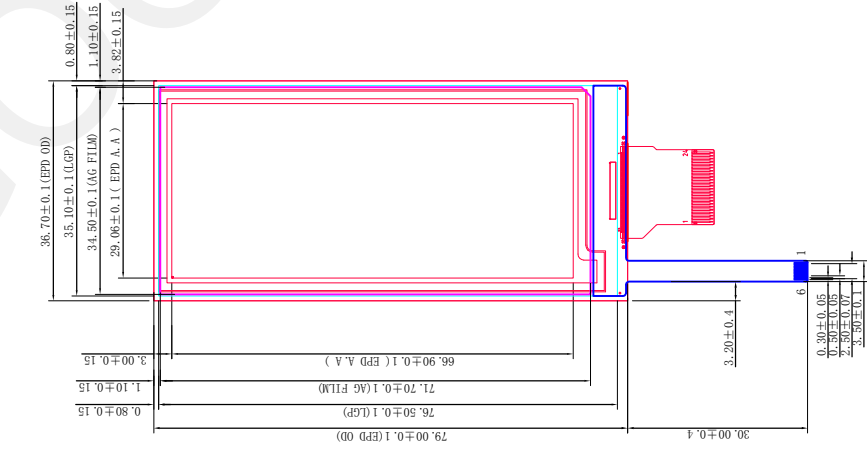


后视图 1:1

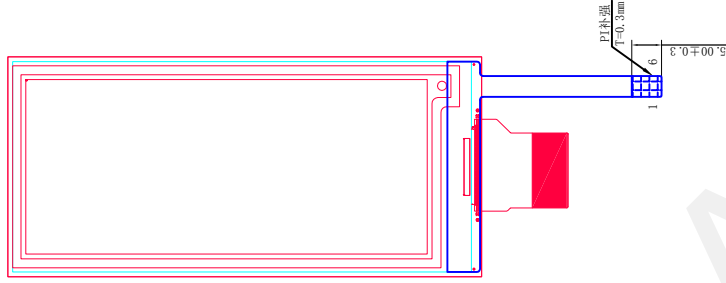

**Technical parameter**

1. AG FILM+LGP+EPD
2. Outline Dimension: 79x36.7x2.03
3. The front light is 4 LED lights connected in series, Voltage  $\leq 12V$ , Current  $\leq 15mA$ ;
4. Surface Hardness: 2H
5. Luminousness:  $\geq 83\%$
6. Unmarked size tolerance is  $\pm 0.2mm$

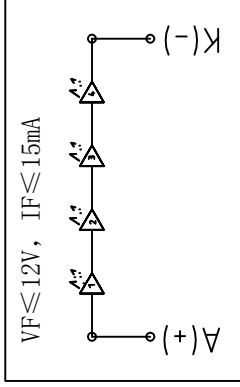

FL Pin define	FL Pin define
1	LED+
2	LED+
3	NC
4	NC
5	LED-
6	LED-

大连佳显电子有限公司  
DALIAN GOOD DISPLAY CO., LTD

DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GDEW029T5-FL02	VIEW: 视图:	第三角投影法
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	投影方式:	第三角投影法
APPROVED BY: 批准:	DATE: 日期: 2020-08-19	UNITS 单位:	mm
Standard tolerance: 公差:	WEBSITE: 网址: www.sundenal.com	SCALE 比例:	1:1

## 1. Frontlight technical parameters

### 1.1 Mechanical Specifications

Parameter	Specifications	Unit	Remark
Display operating mode	Reflective mode		
Surface Treatment	Anti-glare treatment for protective sheet		
luminousness	>83	%	

### 1.2 Recommended driving condition for Front light

GND = 0 V, Ta = 25°C

Parameter	Symbol	Min	TYP	MAX	Unit	Remark
Supply voltage of LED Front light	VLED	-	-	12	V	
Supply current of LED Front light	ILED	-	-	15	mA	
Front light Power Consumption	PLED	-	-	180	mW	